


FEATURES

- Available Output Voltage: 12.0V
- Maximum Input Voltage:
35V for $V_{OUT} > 10V$
- Maximum Output Current:
Exceed 100mA at $T_J = 25^{\circ}C$
- Output Tolerances:
 $\pm 3\%$ at $T_J = 25^{\circ}C$
 $\pm 5\%$ over the Operating T_J
- No External Components

Applications


- TV Board
- Air Conditioner
- Vehicle Mounted Radar
- Charging Device

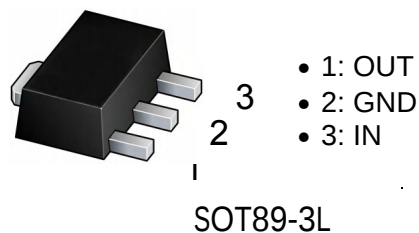


Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
78L12	SOT89-3L	78L12	1000

Typical Application Circuit

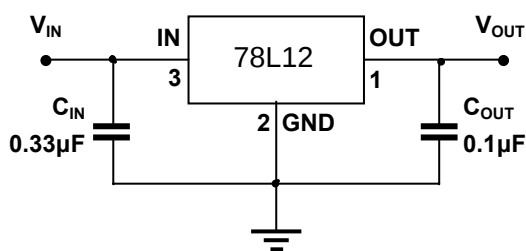

Conventional Circuit

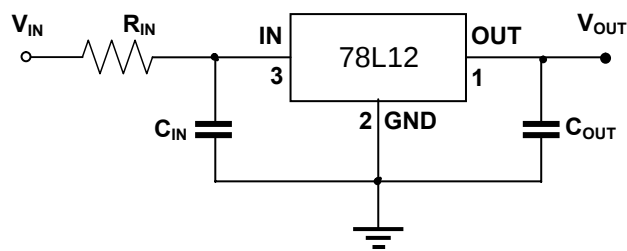

Resistance are used at IN

Absolute Maximum Ratings

CHARACTERISTIC	SYMBOL	VALUE	UNIT
Maximum input voltage	V_{IN}	35	V
Maximum junction temperature	$T_{J\ Max}$	150	°C
Storage temperature	T_{stg}	- 65 ~ 150	°C
Soldering temperature & time	T_{solder}	260°C, 10s	-


Electrical Characteristics

78L12 ($V_{OUT} = 12V$, $V_{IN} = 19V$, $I_{OUT} = 40mA$, $C_{IN} = 0.33\mu F$, $C_{OUT} = 0.1\mu F$, $T_J = 25^\circ C$, unless otherwise specified)


CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP. ⁽⁸⁾	MAX.	UNIT
Input voltage	V_{IN}	-	-	-	35	V
Output voltage	V_{OUT}	$T_J = 25^\circ C$	11.64	12.00	12.36	V
		$V_{IN} = 14 \text{ to } 27V$, $I_{OUT} = 1 \text{ to } 40mA$	11.40	12.00	12.60	
		$I_{OUT} = 1 \text{ to } 70mA$	11.40	12.00	12.60	
Output current	I_{OUT}	$T_J = 25^\circ C$	100	-	-	mA
Quiescent current	I_Q	$I_{OUT} = 0mA$	-	4.3	6.5	mA
Quiescent current change	ΔI_Q	$V_{IN} = 14.5 \text{ to } 27V$	-	-	1.5	mA
		$I_{OUT} = 1 \text{ to } 40mA$	-	-	0.1	mA
Dropout voltage	$V_{DO}^{(9)}$	$T_J = 25^\circ C$	-	1.7	-	V
Line regulation	ΔV_{LINE}	$V_{IN} = 14.5 \text{ to } 27V$, $T_J = 25^\circ C$	-	55	250	mV
		$V_{IN} = 16 \text{ to } 27V$, $T_J = 25^\circ C$	-	49	200	
Load regulation	ΔV_{LOAD}	$I_{OUT} = 1 \text{ to } 100mA$, $T_J = 25^\circ C$	-	22	100	mV
		$I_{OUT} = 1 \text{ to } 40mA$, $T_J = 25^\circ C$	-	13	50	
Output noise voltage	V_N	$f = 10 \text{ to } 100kHz$, $T_J = 25^\circ C$	-	70	-	$\mu V/V_{OUT}$
Ripple rejection	RR	$V_{IN} = 15 \text{ to } 25V$, $f = 120Hz$	37	42	-	dB

Typical Characteristics


Output Characteristics

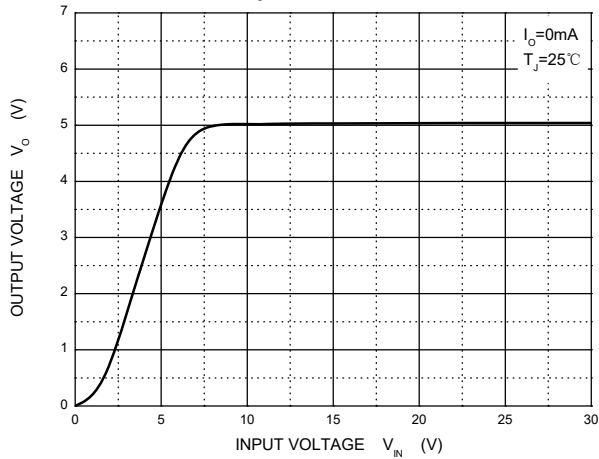


Dropout Characteristics

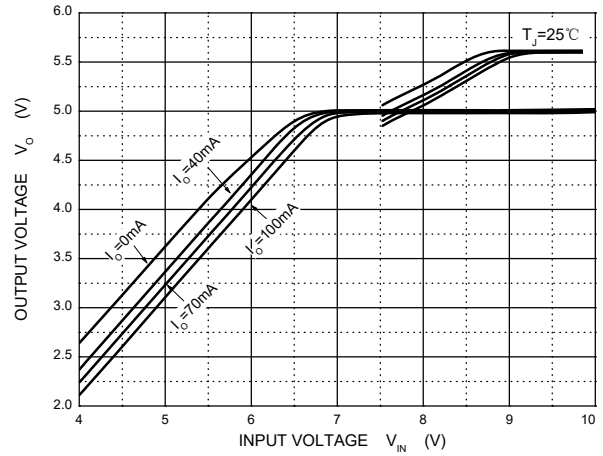


Quiescent Current vs Input Voltage

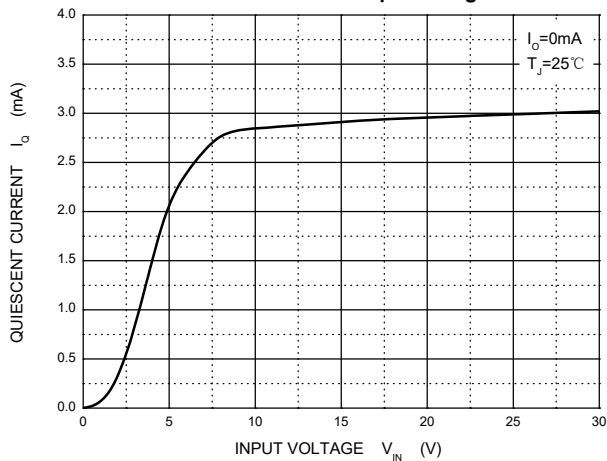


Current Cut-off Grid Voltage

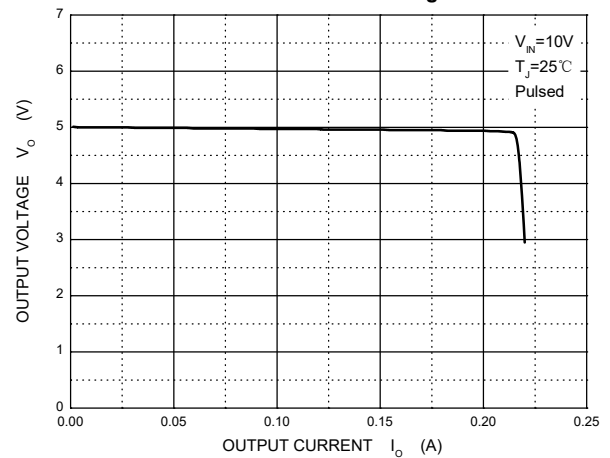


Output Voltage vs Junction Temperature

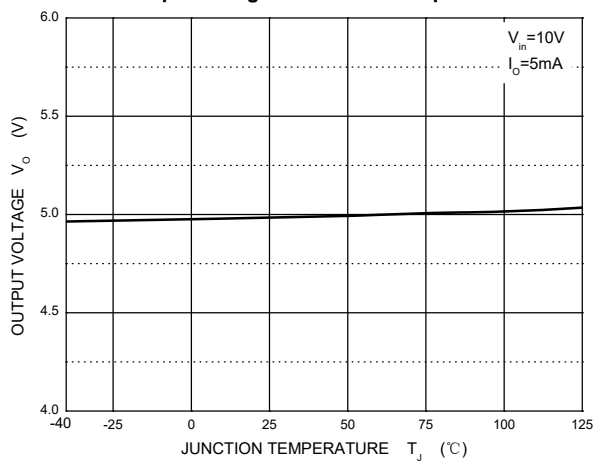

Power Derating Curve

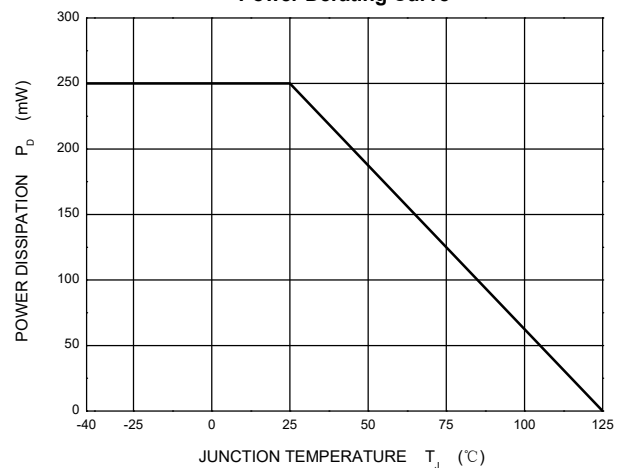

SOT89-3L Package Outline Dimensions

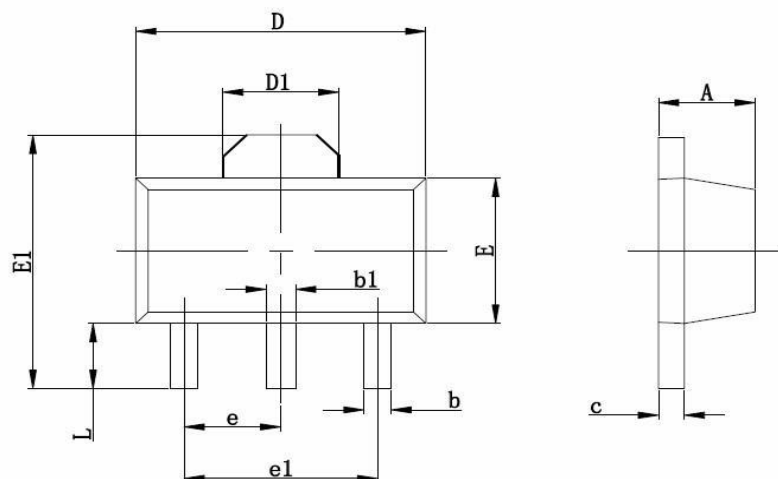

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047