


FEATURES


- Collector Current: $I_C=1A$
- Power Dissipation of 1.5w



SOT-223

Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
BCP54	SOT-223	BCP54	1000
BCP55	SOT-223	BCP55	1000
BCP56	SOT-223	BCP56	1000





MAXIMUM RATINGS (Ta=25 unless otherwise noted)







Parameter	Symbol	Limit	Unit
Collector-Base Voltage	V_{CBO}	BCP54 45	V
		BCP55 60	
		BCP56 100	
Collector-Emitter Voltage	V_{CEO}	BCP54 45	V
		BCP55 60	
		BCP56 80	
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	1	A
Collector Power Dissipation	P_C	1.5	W
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	83.3	°C/W
Junction Temperature	T_J	150	°C
Storage Temperature	T_{stg}	-55~+150	°C

ELECTRICAL CHARACTERISTICS $T_a=25^\circ\text{C}$ unless otherwise specified


Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	BCP54 BCP55 BCP56	$V_{(BR)CBO}$	$I_C=0.1\text{mA}, I_E=0$	45 60 100	V
Collector-emitter breakdown voltage	BCP54 BCP55 BCP56	$V_{(BR)CEO}$	$I_C=10\text{mA}, I_B=0$	45 60 80	V
Base-emitter breakdown voltage		$V_{(BR)EBO}$	$I_E=10\mu\text{A}, I_C=0$	5	V
Collector cut-off current		I_{CBO}	$V_{CB}=30\text{V}, I_E=0$	100	nA
DC current gain		$h_{FE(1)}$	$V_{CE}=2\text{V}, I_C=5\text{mA}$	25	
		$h_{FE(2)}$	$V_{CE}=2\text{V}, I_C=150\text{mA}$	63	250
		$h_{FE(3)}$	$V_{CE}=2\text{V}, I_C=500\text{mA}$	25	
Collector-emitter saturation voltage		$V_{CE(sat)}$	$I_C=500\text{mA}, I_B=50\text{mA}$	0.5	V
Base-emitter voltage		V_{BE}	$V_{CE}=2\text{V}, I_C=500\text{mA}$	1	V
Transition frequency		f_T	$V_{CE}=10\text{V}, I_C=50\text{mA}, f=100\text{MHz}$	100	MHz

Typical Characteristics

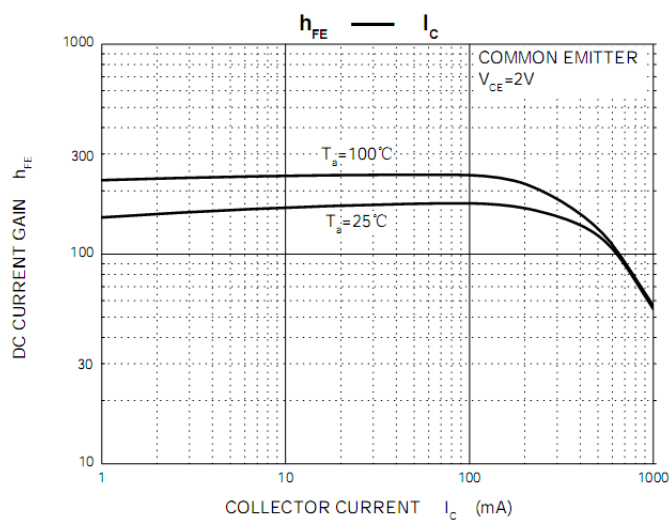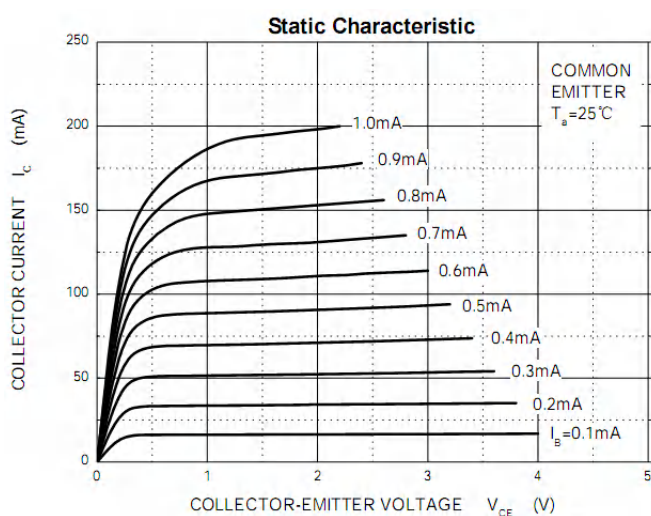

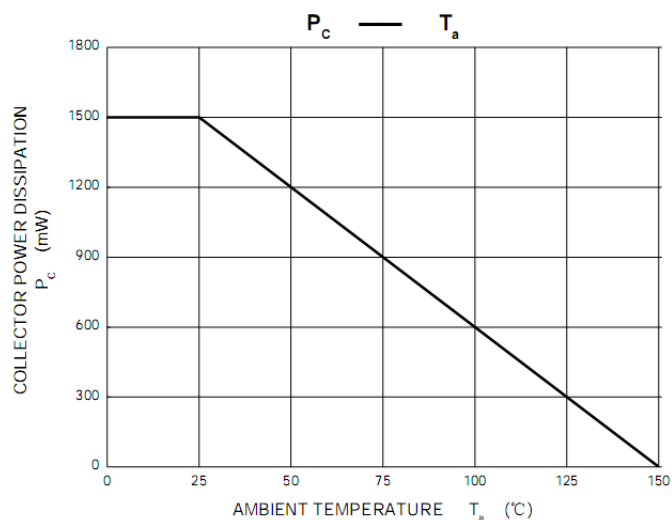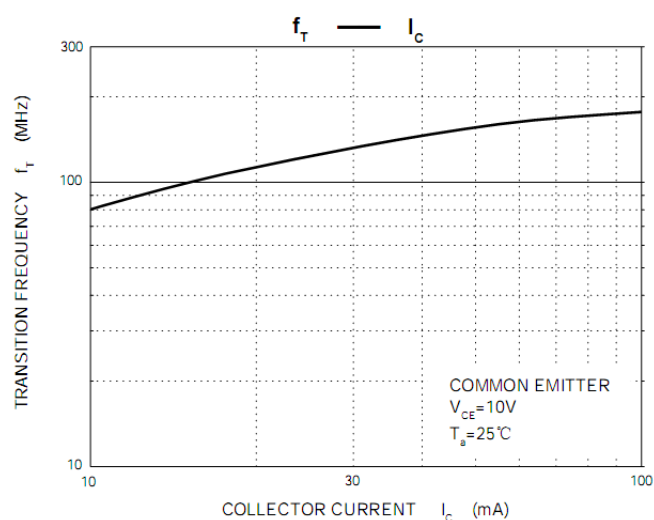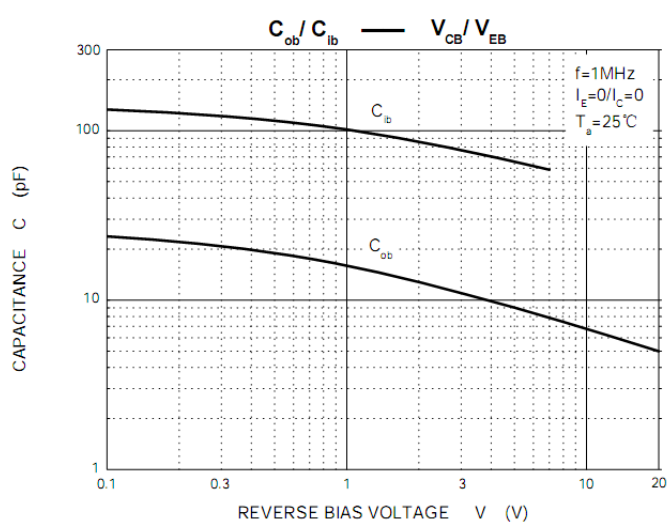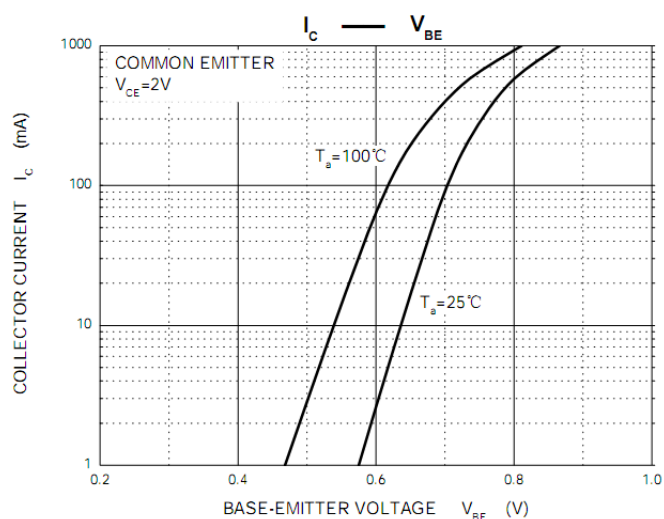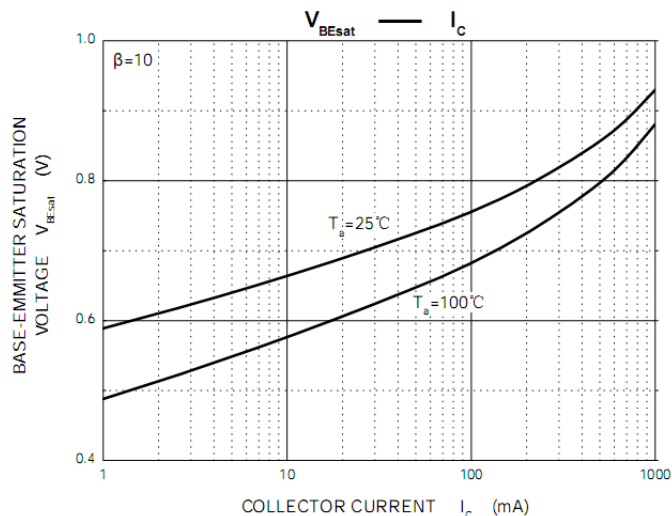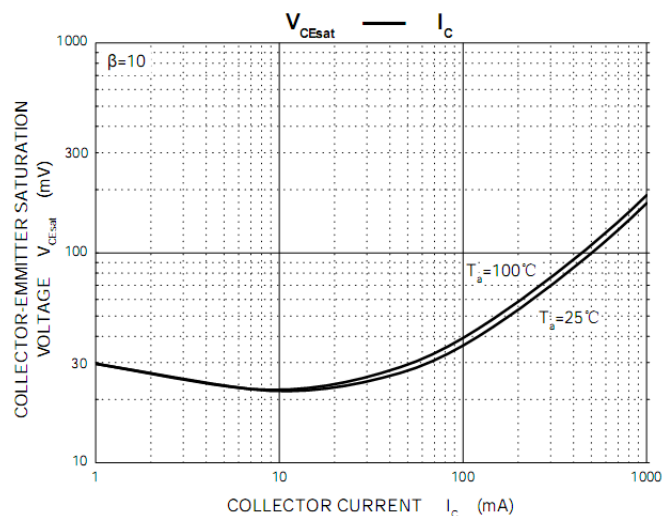

SOT-223 Package Outline Dimensions

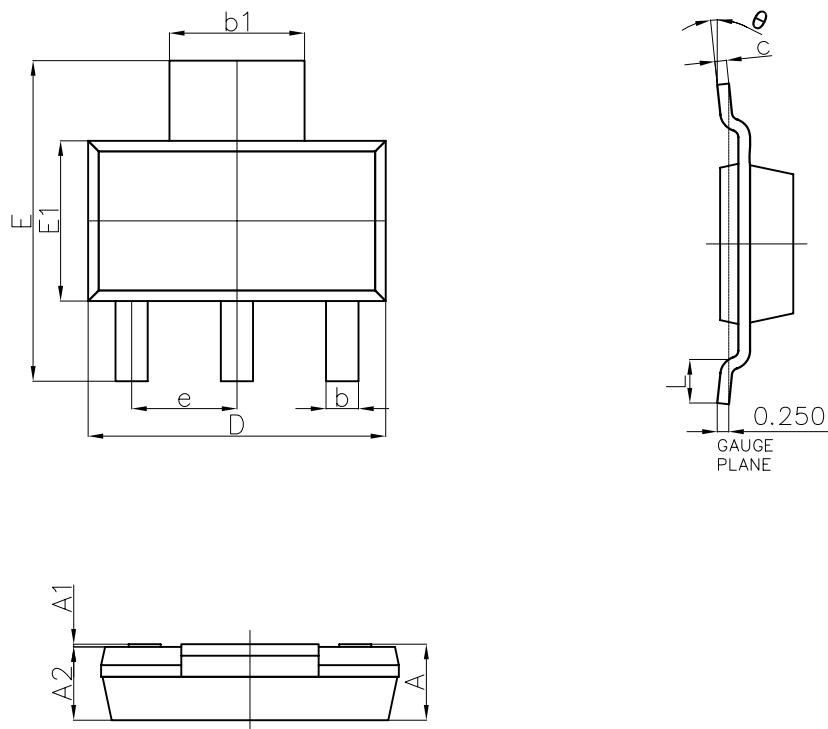

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	—	1.800	—	0.071
A1	0.020	0.100	0.001	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.840	0.026	0.033
b_1	2.900	3.100	0.114	0.122
c	0.230	0.350	0.009	0.014
D	6.300	6.700	0.248	0.264
E	6.700	7.300	0.264	0.287
E_1	3.300	3.700	0.130	0.146
e	2.300(BSC)		0.091(BSC)	
L	0.750	—	0.030	—
θ	0°	10°	0°	10°