

## FEATURES

- Peak Forward Current:  $I_{FM}=350\text{mA}$
- Power Dissipation of 150mw



## Package Marking and Ordering Information

| Product ID | Pack    | Marking | Qty(PCS) |
|------------|---------|---------|----------|
| SD103AWT   | SOD-523 | S4      | 3000     |







## MAXIMUM RATINGS (Ta=25 unless otherwise noted)

| Symbol          | Parameter                                         | Value    | Unit |
|-----------------|---------------------------------------------------|----------|------|
| $V_{RRM}$       | Peak Repetitive Reverse Voltage                   | 40       | V    |
| $V_{RWM}$       | Working Peak Reverse Voltage                      |          |      |
| $V_R$           | DC Blocking Voltage                               |          |      |
| $V_{R(RMS)}$    | RMS Reverse Voltage                               | 28       | V    |
| $I_{FM}$        | Forward Continuous Current                        | 350      | mA   |
| $I_{FSM}$       | Non-Repetitive Peak Forward Surge Current@t=8.3ms | 2        | A    |
| $P_D$           | Power Dissipation                                 | 150      | mW   |
| $R_{\theta JA}$ | Thermal Resistance From Junction To Ambient       | 667      | °C/W |
| $T_j$           | Junction Temperature                              | 125      | °C   |
| $T_{stg}$       | Storage Temperature                               | -55~+150 | °C   |


## ELECTRICAL CHARACTERISTICS (Ta=25 unless otherwise specified)

| Parameter             | Symbol     | Test conditions                                       | Min | Typ  | Max  | Unit    |
|-----------------------|------------|-------------------------------------------------------|-----|------|------|---------|
| Reverse voltage       | $V_{(BR)}$ | $I_R=100\mu A$                                        | 40  |      |      | V       |
| Reverse current       | $I_R$      | $V_R=30V$                                             |     |      | 5    | $\mu A$ |
|                       |            | $V_R=20V$                                             |     |      | 2    |         |
|                       |            | $V_R=10V$                                             |     |      | 1    |         |
| Forward voltage       | $V_F$      | $I_F=1mA$                                             |     | 0.27 |      | V       |
|                       |            | $I_F=5mA$                                             |     | 0.32 |      |         |
|                       |            | $I_F=20mA$                                            |     |      | 0.37 |         |
|                       |            | $I_F=200mA$                                           |     |      | 0.6  |         |
| Total capacitance     | $C_{tot}$  | $V_R=0V, f=1MHz$                                      |     | 50   |      | pF      |
| Reverse recovery time | $t_{rr}$   | $I_F=I_R=200mA, I_{rr}=0.1 \times I_R, R_L=100\Omega$ |     | 10   |      | ns      |

## Typical Characteristics

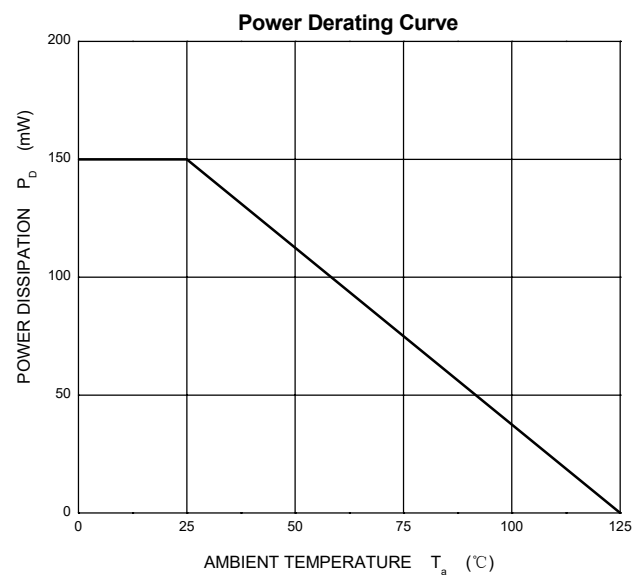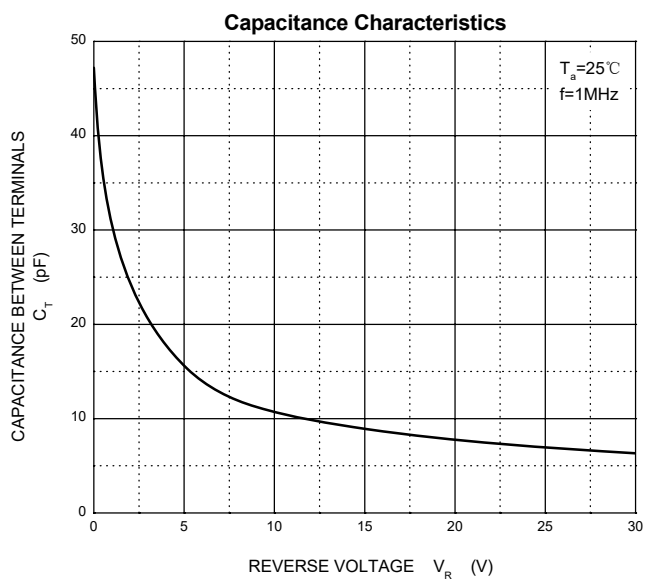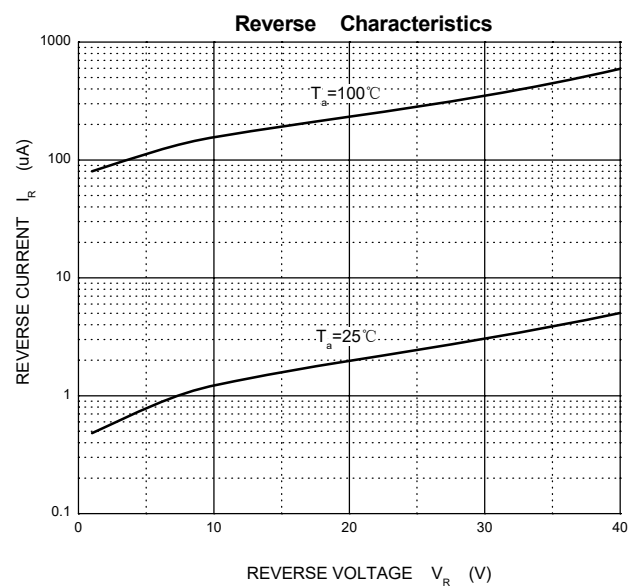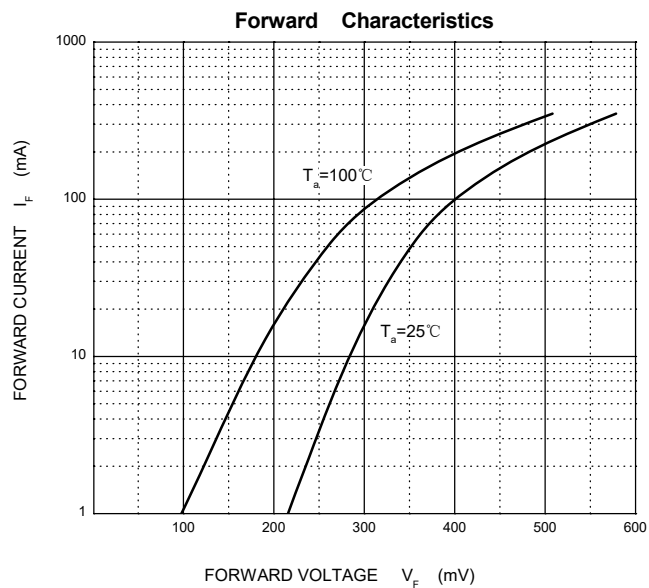

### SOD-523 Package Outline Dimensions

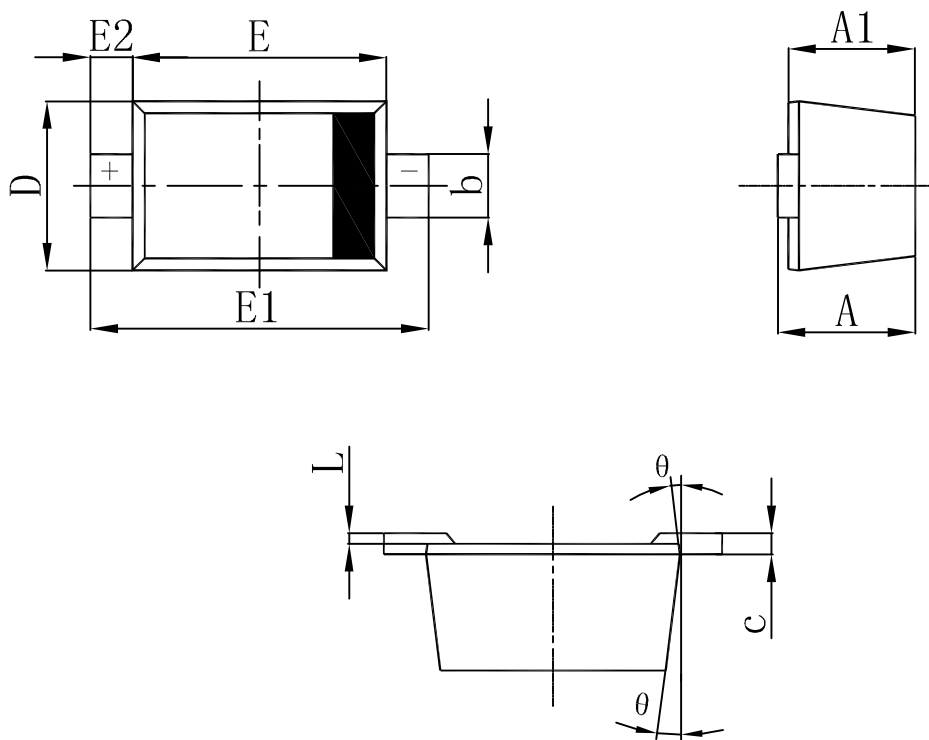

| Symbol   | Dimensions In Millimeters |       | Dimensions In Inches |       |
|----------|---------------------------|-------|----------------------|-------|
|          | Min                       | Max   | Min                  | Max   |
| A        | 0.510                     | 0.770 | 0.020                | 0.031 |
| A1       | 0.500                     | 0.700 | 0.020                | 0.028 |
| b        | 0.250                     | 0.350 | 0.010                | 0.014 |
| c        | 0.080                     | 0.150 | 0.003                | 0.006 |
| D        | 0.750                     | 0.850 | 0.030                | 0.033 |
| E        | 1.100                     | 1.300 | 0.043                | 0.051 |
| E1       | 1.500                     | 1.700 | 0.059                | 0.067 |
| E2       | 0.200 REF                 |       | 0.008 REF            |       |
| L        | 0.010                     | 0.070 | 0.001                | 0.003 |
| $\theta$ | 7° REF                    |       | 7° REF               |       |